

FIG. 1

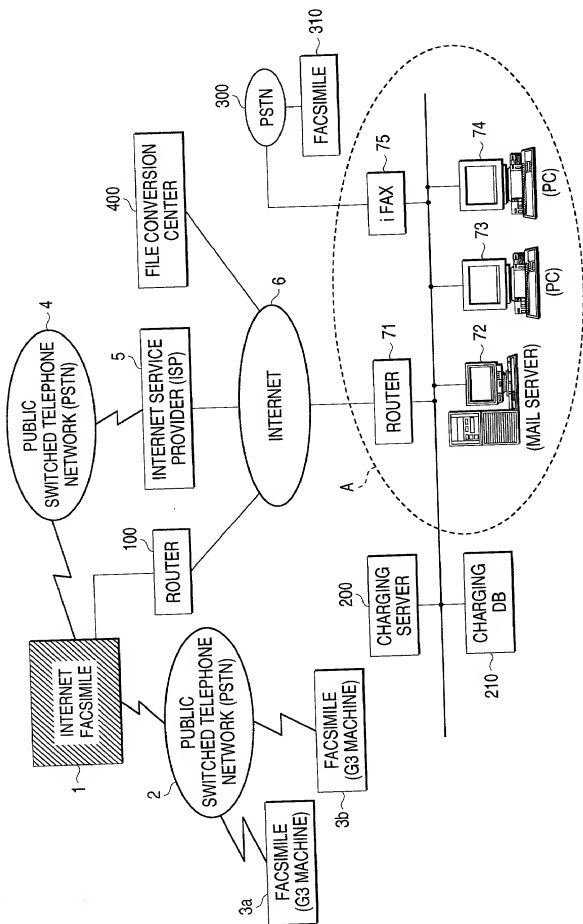


FIG. 2

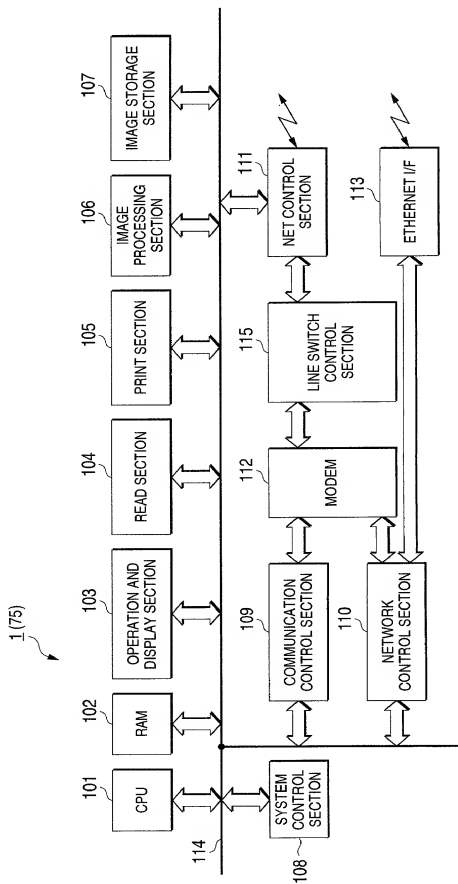


FIG. 3

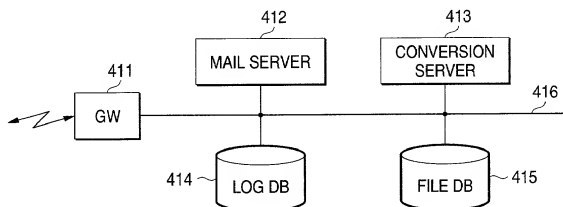


FIG. 4

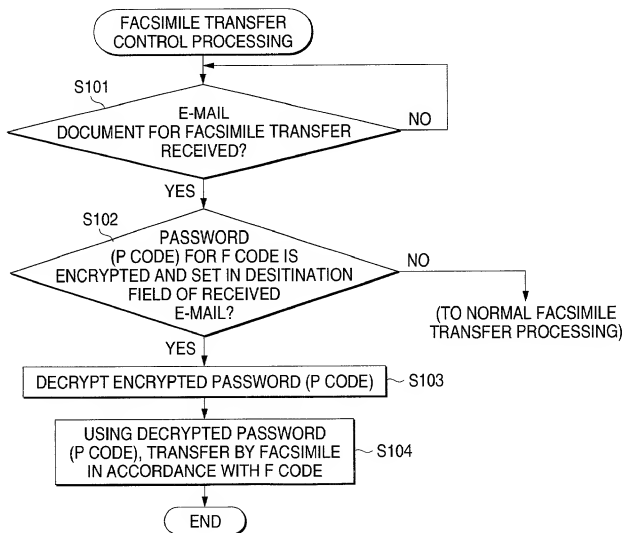


FIG. 5

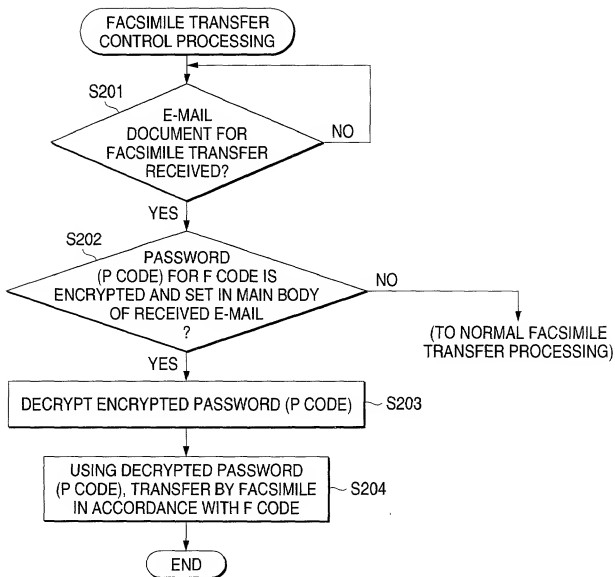


FIG. 6

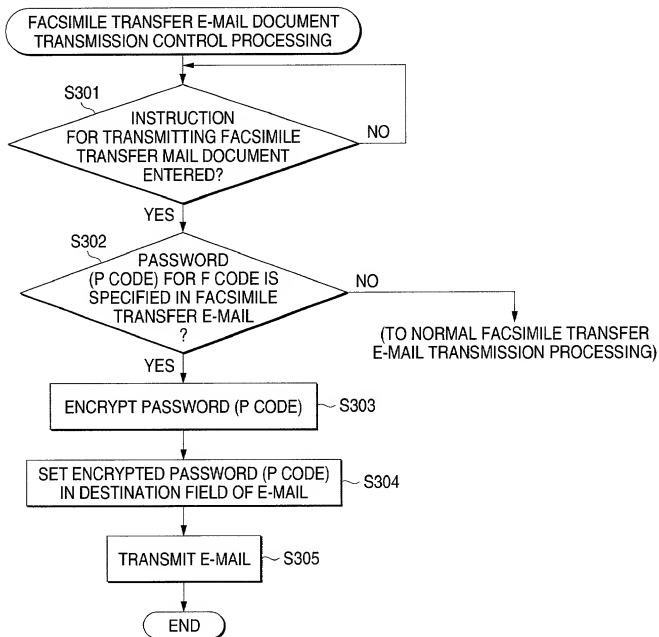


FIG. 8

E-MAIL DATA FORMAT

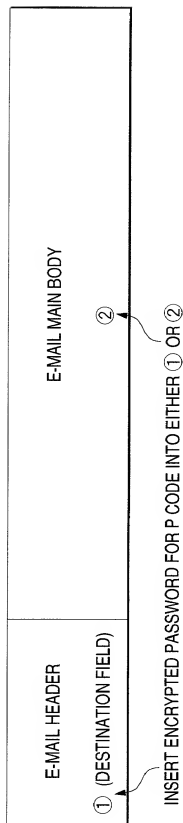


FIG. 9

EXAMPLE OF SETTING P CODE IN E-MAIL HEADER

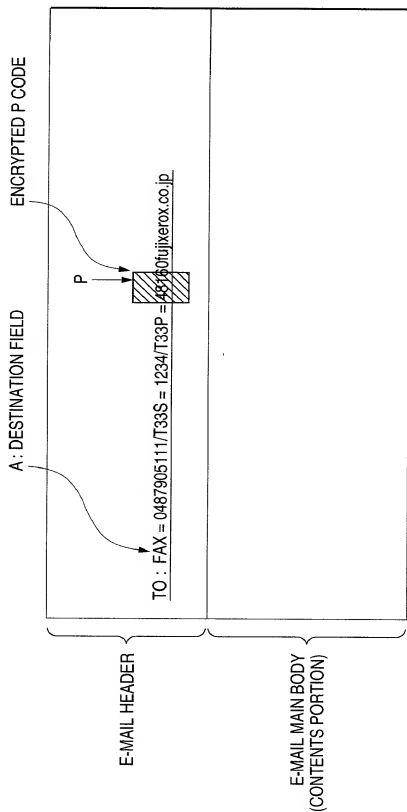


FIG. 10

| ABBREVIATED NUMBER (NO.) | ASSOCIATED NAME | DESTINATION INFORMATION (TELEPHONE NUMBER/E-MAIL ADDRESS) |
|-----------------------------|-----------------|--|
| 1 | TARO FUJI | 03-XXXX-1234 |
| 2 | HANAKO FUJI | F.Hanako@fujixerox.co.jp |
| ⋮ | ⋮ | ⋮ |
| N | ICHIRO FUJI | 03-XXXX-5678 |

FIG. 11

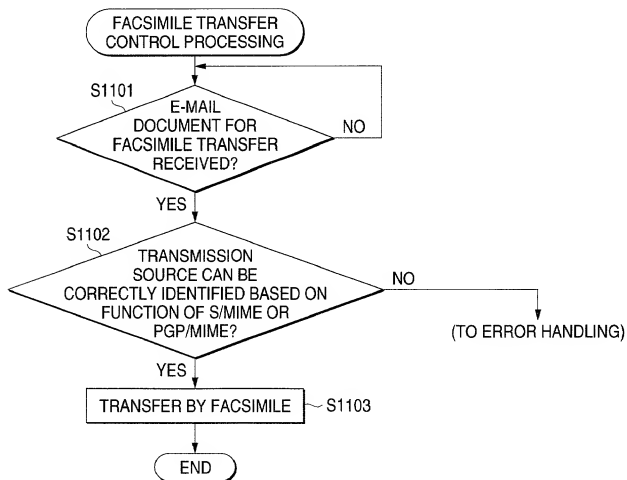


FIG. 12


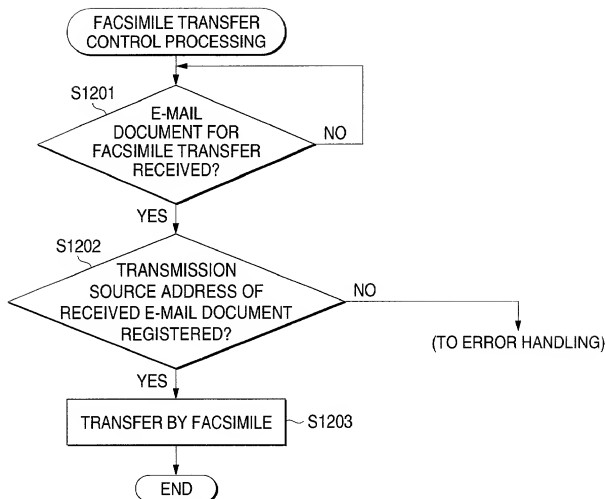


FIG. 13

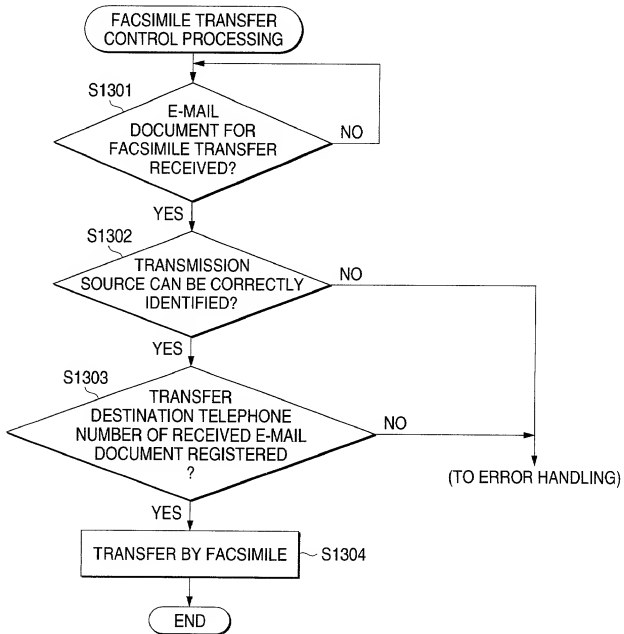

12/38

FIG. 14

< REASON WHY FACSIMILE TRANSFER IS REFUSED >
STORAGE MEMORY IS INSUFFICIENT

.....
< E-MAIL HEADER >

DATE : FRI, 8 DEC 2000 11:37:15 +0900 (JST)
FROM : watashi@ifax.co.jp
TO : anata@ifax.co.jp
CC :
SUBJECT : DOCUMENT DISTRIBUTION

.....
< E-MAIL BODY >

ATTACHED IS A DOCUMENT USED AT A MEETING.
STARTING FROM 9:30 ON DECEMBER 11 (MON).

.....
< ATTACHED FILE >

INVENTION PROPOSAL

INVENTION TITLE : INTERNET FACSIMILE
INVENTOR :

FIG. 16

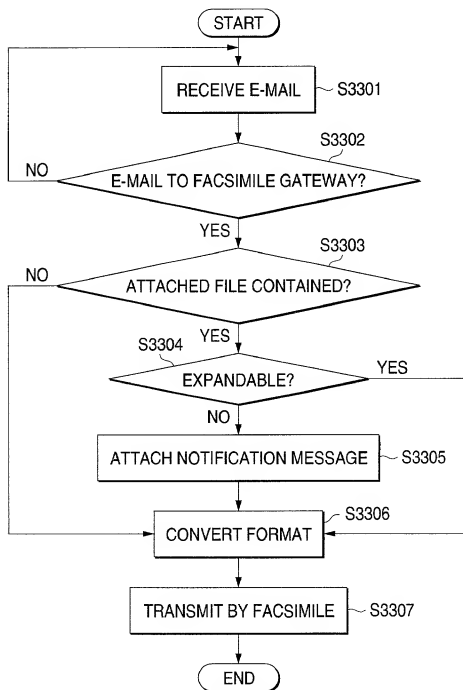


FIG. 17

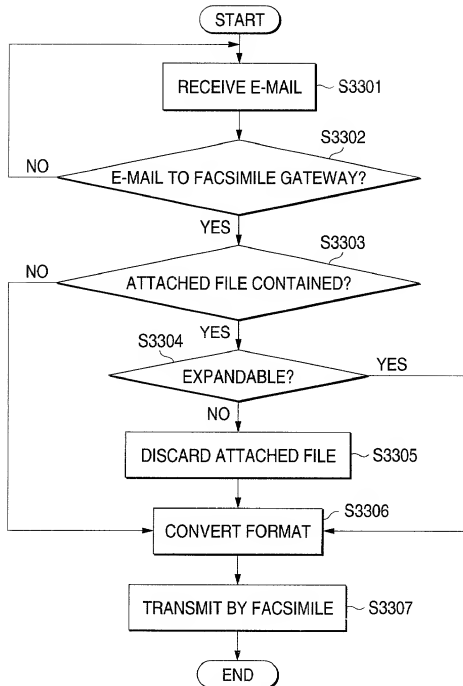


FIG. 18

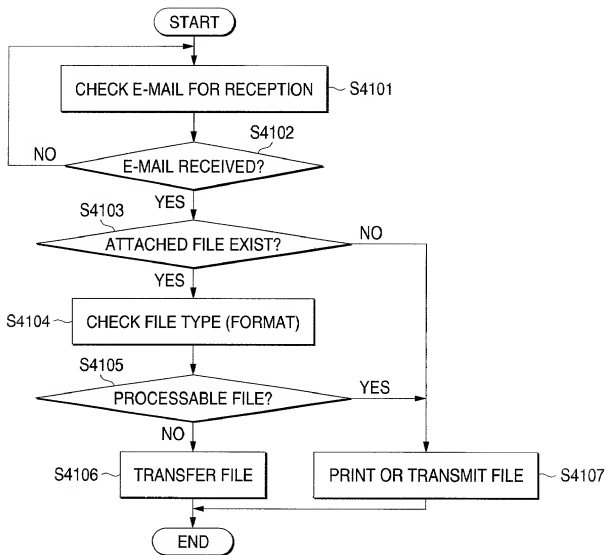


FIG. 19

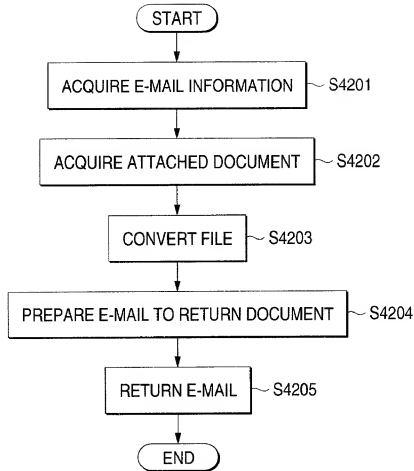


FIG. 20

| DATE | TRANSMITTING PARTY ADDRESS | FILE TYPE | FILE SIZE |
|----------------|----------------------------|-----------|-----------|
| 20001220082655 | xxx@xxx.co.jp | XX VER4.1 | 986 |
| 20001220091234 | yyy@yyy.co.jp | YYY | 435 |
| 20001220091248 | zzz@zzz.com | ZZZ | 1,671 |
| ⋮ | ⋮ | ⋮ | ⋮ |

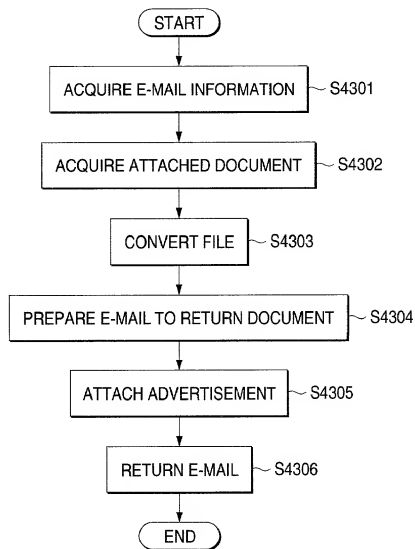
FIG. 21

FIG. 22

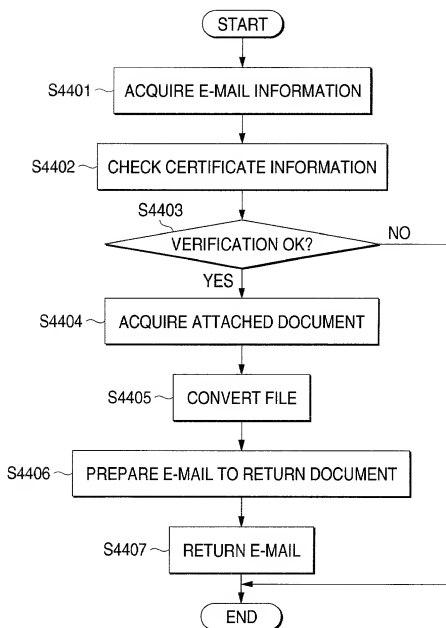


FIG. 23

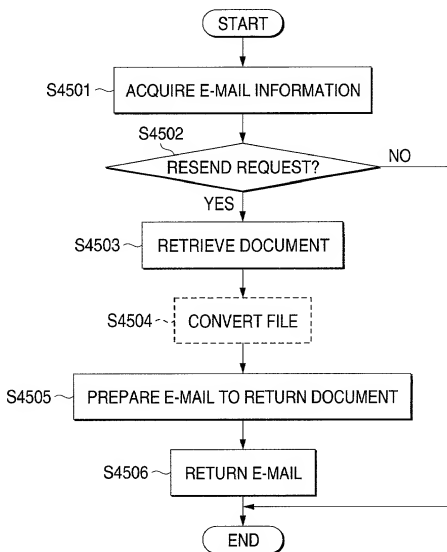


FIG. 24

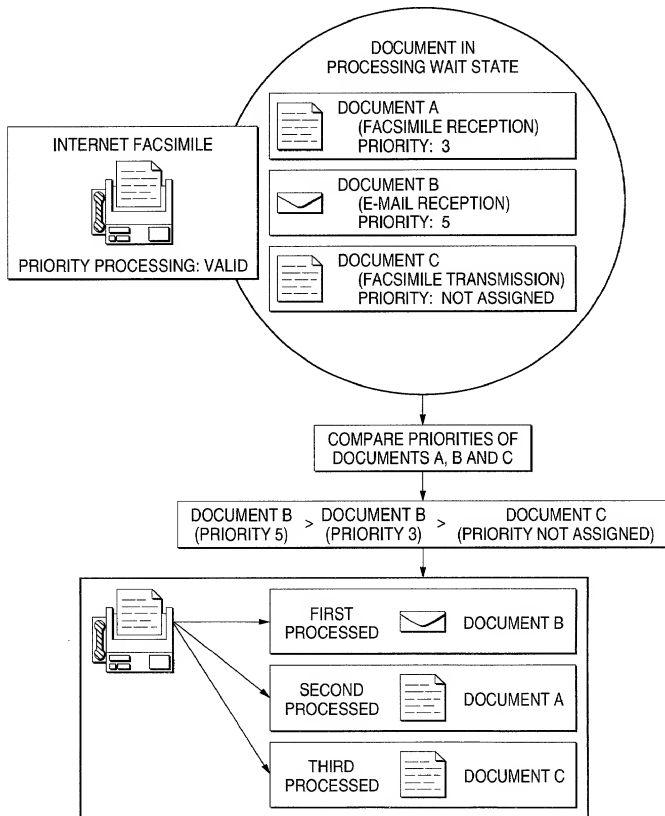


FIG. 25

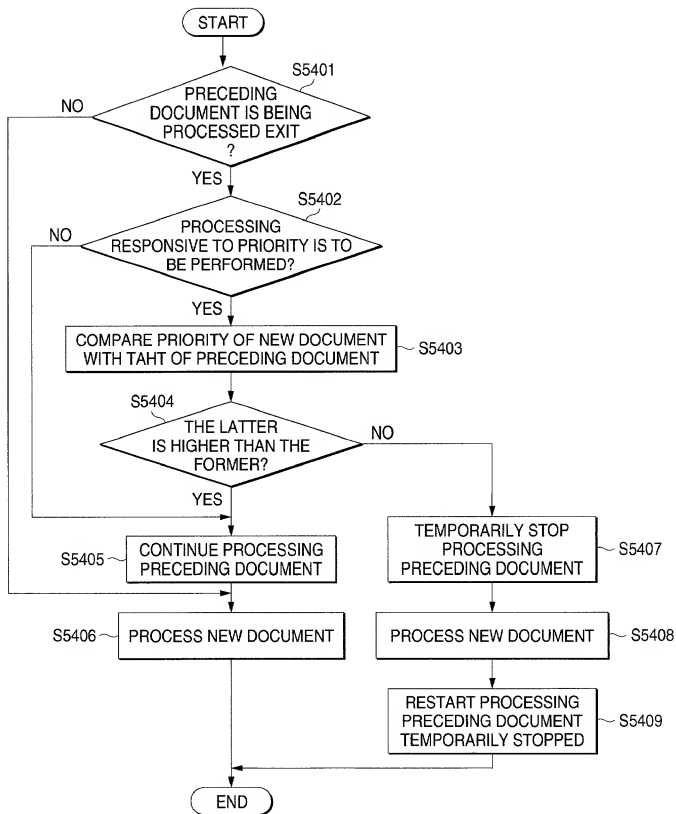


FIG. 26

FUNCTION SETTING

CLOSE

IDENTIFIED
IMAGE QUALITY

ORIGINAL TYPE

TRANSMISSION
DENSITY

PRIORITY
TRANSFER

PRIORITY
PROCESSING

PRIORITY
SETTING

PREVIOUS PAGE

NEXT PAGE

FIG. 27


DESTINATION : SHIBUYA BRANCH


ADDRESS : shibuya@ifax.co.jp

PREVIOUS PAGE

PRIORITY
SETTING (1 - 5)

3

HIGH 

LOW 

START

NEXT PAGE

CANCEL

FIG. 28

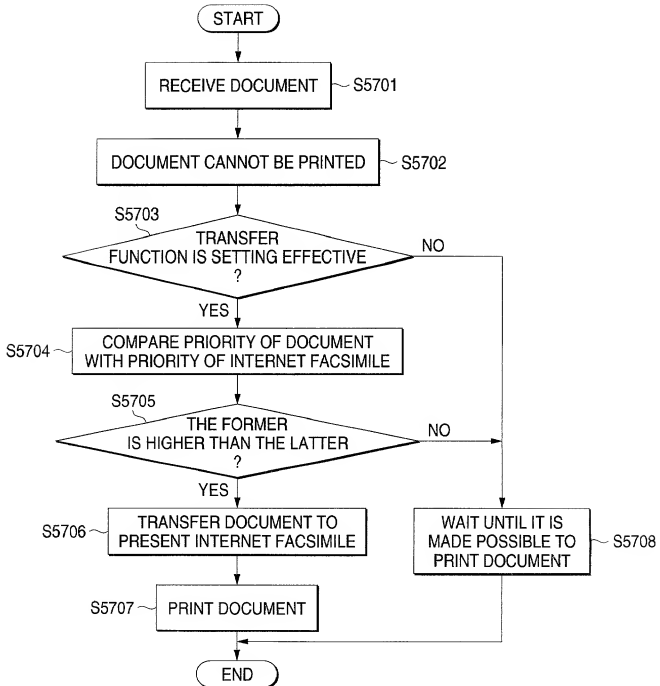


FIG. 29

FUNCTION SETTING

CLOSE

PRIORITY TRANSFER

EFFECTIVE

INEFFECTIVE

PRIORITY SETTING (1 - 5)

3

HIGH

LOW

NEXT PAGE

FIG. 30

FUNCTION SETTING

CLOSE

PRIORITY TRANSFER

EFFECTIVE

INEFFECTIVE

TRANSFER FACSIMILES

i FAX-A

i FAX-B

i FAX-C

PREVIOUS PAGE

FIG. 31

FIG. 31 is a screenshot of a function setting menu. At the top, the text "FUNCTION SETTING" is followed by a horizontal line. In the top right corner, there is a button labeled "CLOSE". Below the line, the text "PRIORITY TRANSFER" is displayed. Underneath, there are two options: "EFFECTIVE", which is highlighted with a diagonal hatched pattern, and "INEFFECTIVE", which is in a plain rectangular box.

FIG. 32

FIG. 32 is a screenshot of a function setting menu, similar to FIG. 31. It features the same "FUNCTION SETTING" header and "CLOSE" button. Below the "PRIORITY TRANSFER" title, the menu shows "PRIORITY : 3" in a rectangular box. Further down, another box displays "TRANSFER FACSIMILES : i FAX-A, i FAX-C".

FIG. 33

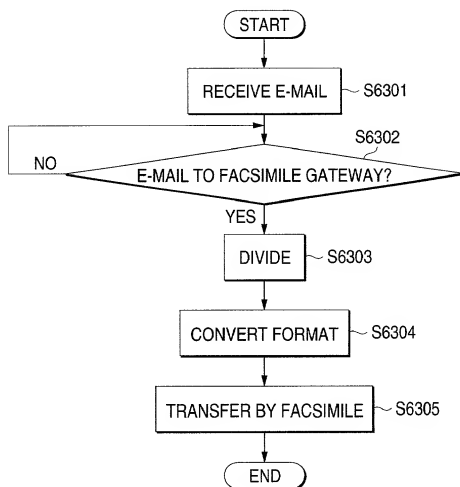


FIG. 34

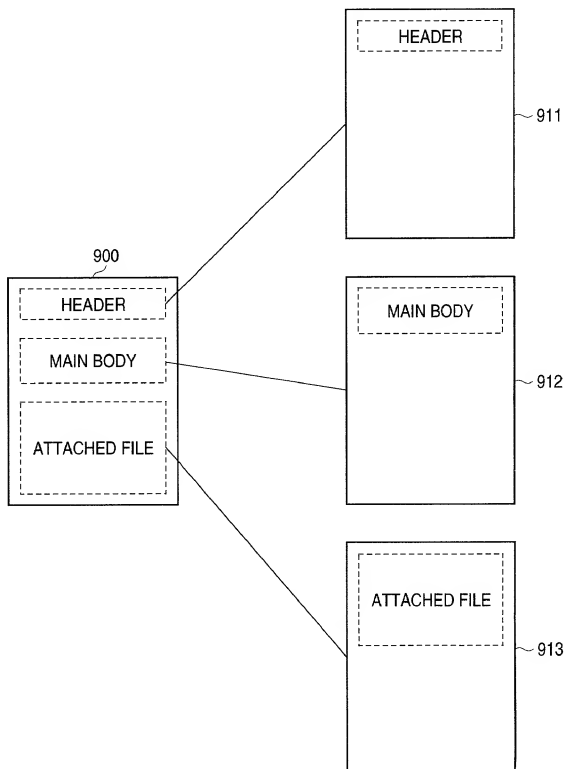


FIG. 35

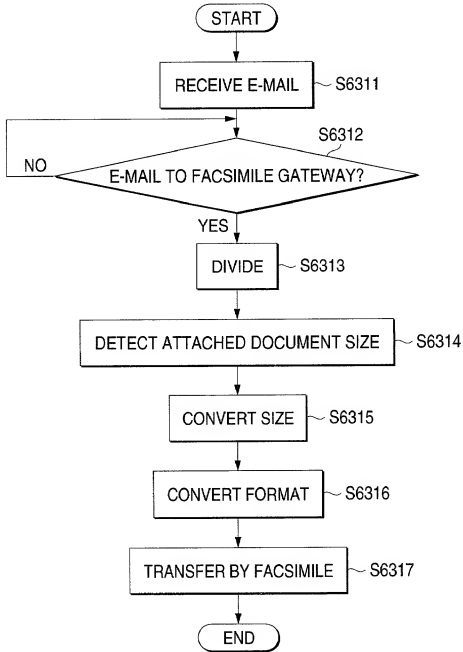


FIG. 36

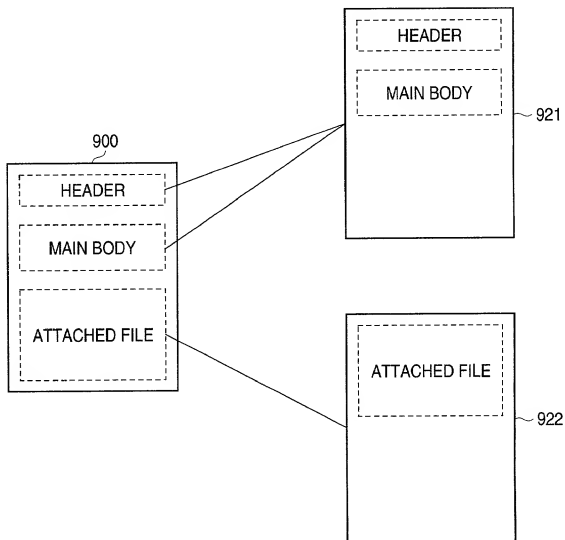


FIG. 37

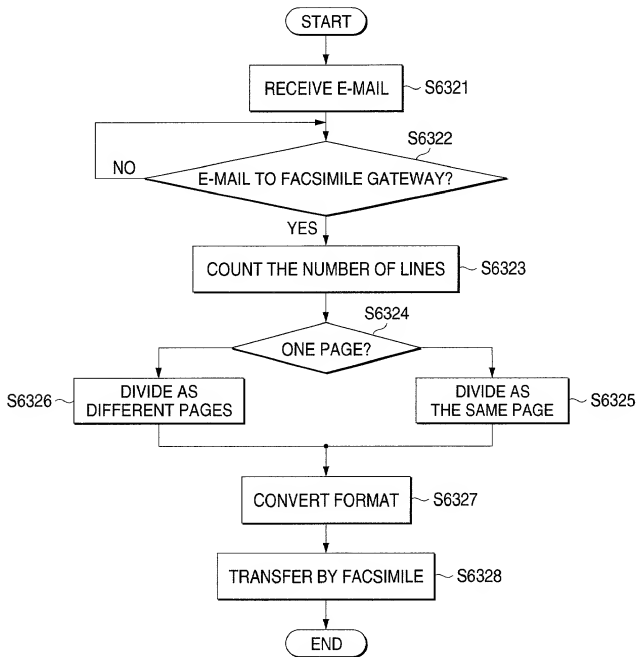


FIG. 38

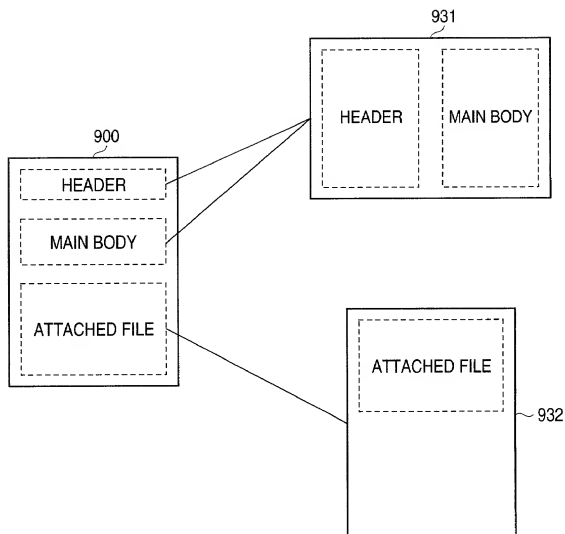


FIG. 39

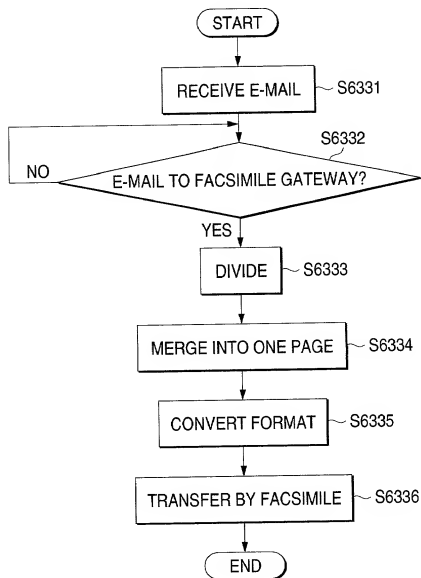


FIG. 40

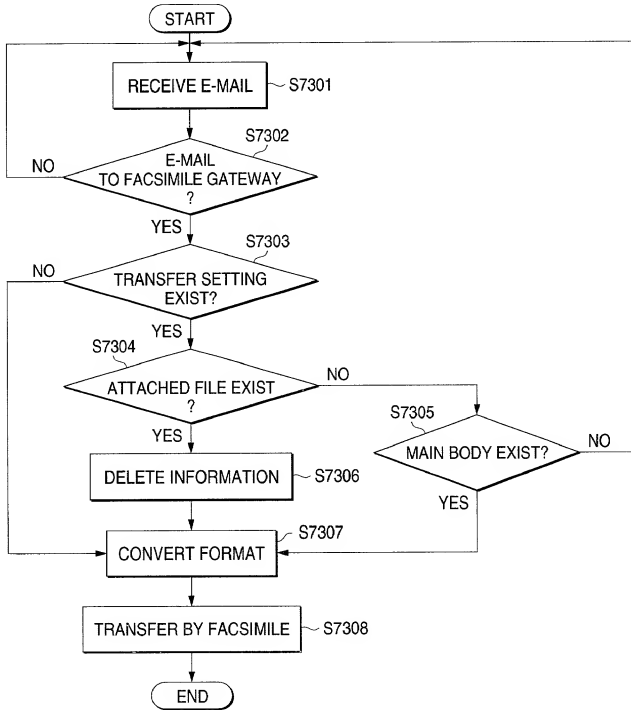


FIG. 41

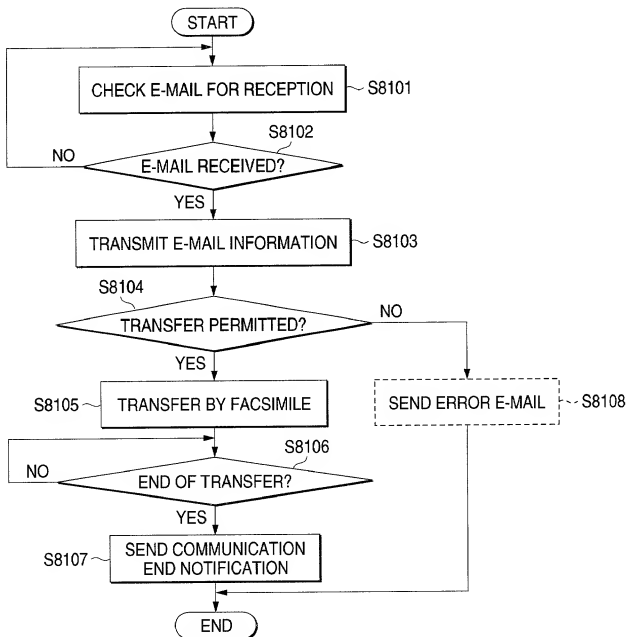


FIG. 42

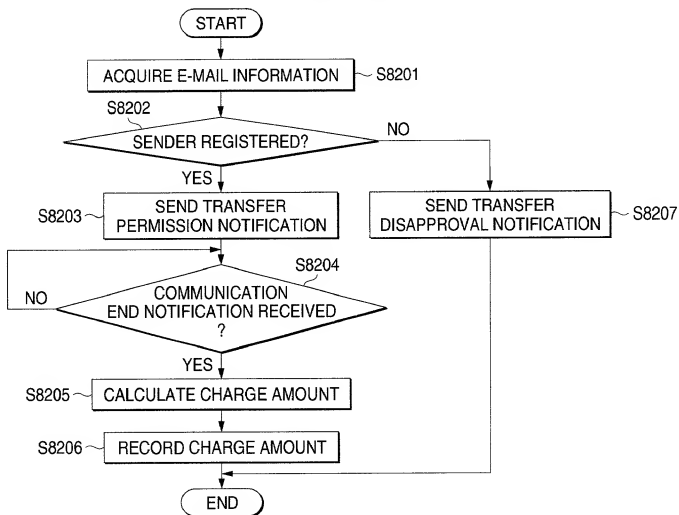


FIG. 43

| SENDER | E-MAIL ADDRESS | SIGNATURE | TRANSFER ROUTE | CHARGING AMOUNT |
|--------|----------------|--------------|------------------|-----------------|
| XX XX | xxx@xxx.co.jp | NOT REQUIRED | | ***** |
| | | REQUIRED | EXCEPT THE ABOVE | |
| | yyy@yyy.ne.jp | NOT REQUIRED | | |
| YY YY | zzz@xxx.co.jp | NOT REQUIRED | | ***** |
| | | REQUIRED | EXCEPT THE ABOVE | |
| | zzz@yyy.ne.jp | NOT REQUIRED | | |
| ⋮ | ⋮ | ⋮ | ⋮ | ⋮ |

FIG. 44

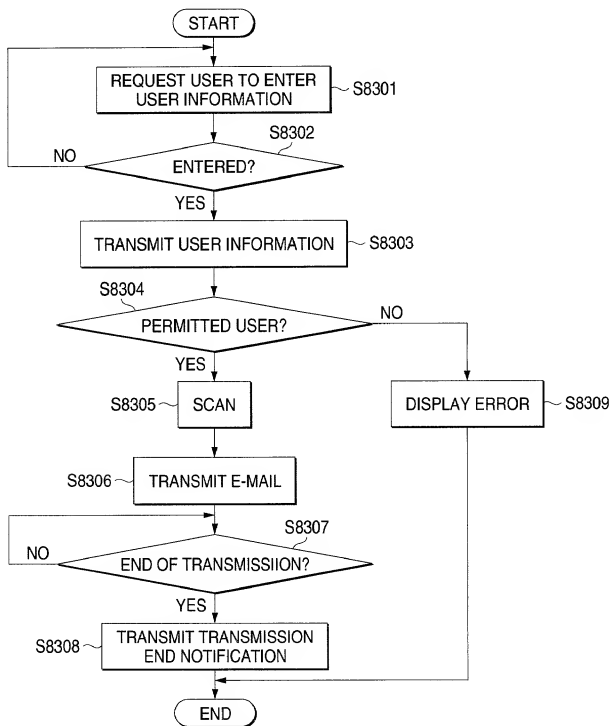


FIG. 45

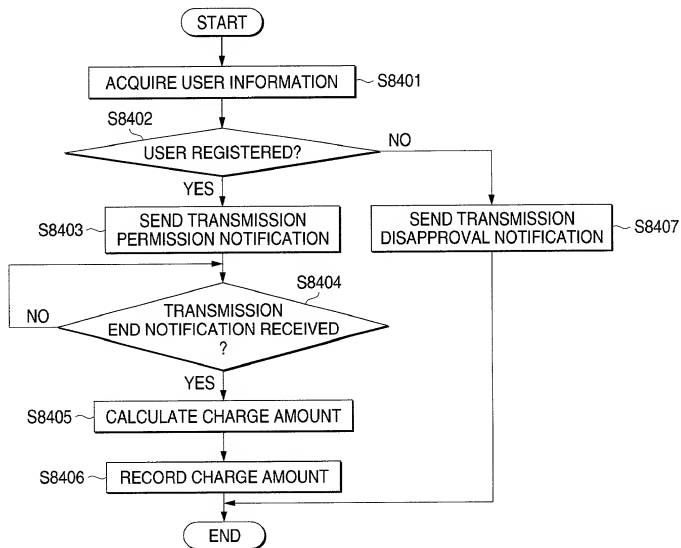


FIG. 46

| USER NAME | USER ID | PASSWORD | CHARGING AMOUNT |
|-----------|---------|----------|-----------------|
| XX XX | YYY | ***** | ***** |
| YY YY | ZZZ | ***** | ***** |
| ⋮ | ⋮ | ⋮ | ⋮ |